


LG-NM3D1515 (3D BEND)

- Multiple spec, voltage 24V, length 5m roll, white light, RGB, optional.
- 15mm width luminous surface, top&side bend, applied for indoor&outdoor decorative lighting and architectural outline lighting etc.
- High light efficacy, LM80 proved.
- Top&side bend integrated design, meet different installation requirements, provide an excellent user experience.
- Silicone extrusion process, IP67 protection level.
- 3 years warranty, life span \geq 36000h.

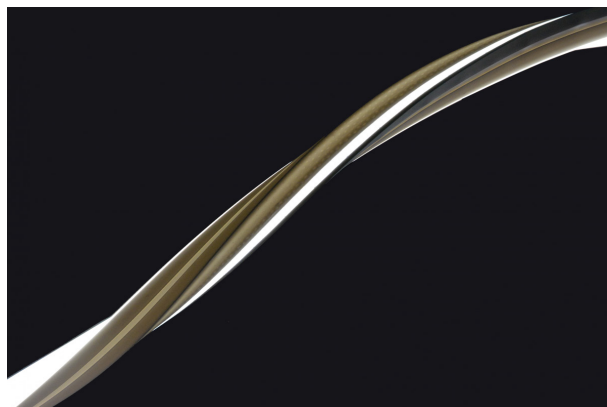

400lm/M
450lm/M
450lm/M

LUMENS

7.2W/M

TYPICAL WATT

2700K
3000K
4000K

COLOUR

IP67

IP RATING

24V

DC

120°


BEAM ANGLE

3
YEARS


WARRANTY

OPTIONAL


DIMMING

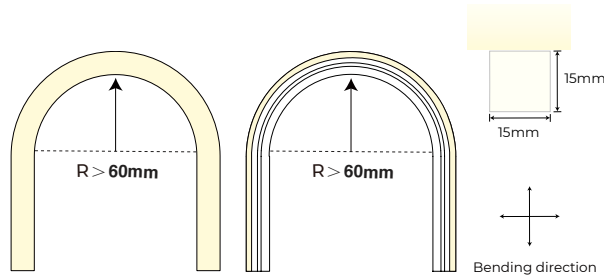


Accessories



End Cap Set
LG-AS-NM3D1515GH0-EC
(L17 x W17 x H24mm)



Moldable Groove
LG-AS-FR-S1515A-005
(L1000 x W15.9 x H11.4mm)



Pre-Installed Al Carrier
LG-AS-FR-S1515A-004
(L1000 x W17 x H17.9mm)

IK08



SALTWATER RESISTANT



SOLVENT RESISTANT



UV RESISTANT



Model	IP Rating	Typical Power (W/M)	Max Power (W/M)	Lumen Output (lm)	CCT	CRI	Beam Angle	Dimming	Cuttable (mm)	Dimensions	Voltage	Bend Radius
LG-NM3D1515	IP67	7.2W/M	8W/M	400lm/M 450lm/M 450lm/M	2700K 3000K 4000K	\geq 90	120°	Optional	7LED 41.66mm	15x15mm	24V DC	\geq 60 mm