

LG-NNR25 (360°)

- 360° round luminous surface, uniform light emission, suitable for spatial decorative lighting.
- High luminous efficiency, passed LM80 test.
- Silicone extrusion process, IP65 protection level.
- Support pendant and surface mounted installation.
- 3 years warranty, life span \geq 36000h.

950lm/M

LUMENS

14.4W

WATT (MAX)

2700K
3000K
4000K
RGB

COLOUR

IP65

IP RATING

24V

DC

115°

BEAM ANGLE

**3
YEARS**

WARRANTY

OPTIONAL

DIMMING




Accessories

 LG-NNR25P1-25

 LG-NNR25P1-100

 LG-AS-NNR25VHS-1000

 LG-NNR25-EC

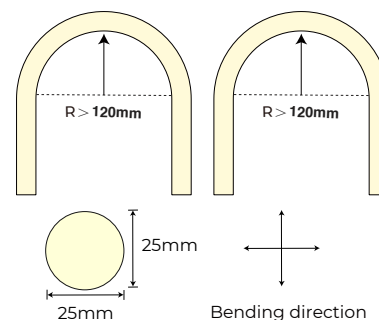

IK08



Model	IP Rating	Power (W)	Lumen Output (lm)	CCT	CRI	Beam Angle	Dimming	Row Type	Cutttable (mm)	Dimensions	Voltage	Bend Radius
LG-NNR25	IP65	14.4W/M	950lm/M	2700K 3000K 4000K	\geq 90	115°	Optional	Single	11.97mm	\varnothing 25mm	24V DC	\geq 120mm
			/	RGB					50mm			