



LG-LN-FR-F16 (SIDE BEND)

- Multiple spec, voltage 24V, length 20m roll, white light, RGB, optional.
- The silicone extrusion process, IP67 protection level, suitable for architectural outdoor lighting etc.
- Resistant to hydrochloric, acid and alkali corrosion, flame retardant, UV resistant.

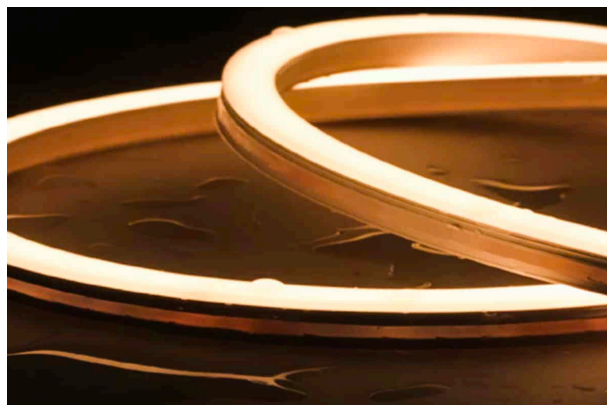

700lm/M 700lm/M 800lm/M LUMENS	18W/M MAX WATT	2700K 3000K 4000K RGB COLOUR	IP67 IP RATING
24V DC	120° BEAM ANGLE	3 YEARS WARRANTY	OPTIONAL DIMMING

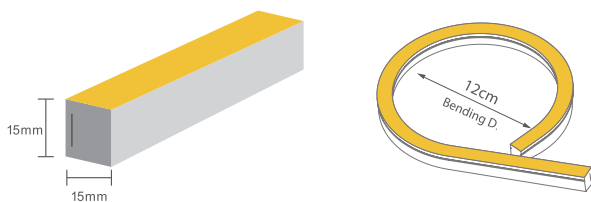

Accessories

End Cap Connector LG-F16B-A005	End Cap LG-F16B-A008	AL Clip 95mm LG-F16B-A009 (L95 x W16 x H1.05mm)
Moldable Groove LG-AS-FR-S1515A-005 (L1000 x W15.9 x H11.4mm)	Pre-Installed Al Carrier LG-AS-FR-S1515A-004 (L1000 x W17 x H17.9mm)	

IK08	SALTWATER RESISTANT	SOLVENT RESISTANT	UV RESISTANT	CE	UL E498657	ROHS	Reach	CB	UK CA
-------------	----------------------------	--------------------------	---------------------	-----------	-------------------	-------------	--------------	-----------	--------------

Model	IP Rating	Power (W)	Lumen Output (lm)	CCT	CRI	Beam Angle	Dimming	Row Type	Cuttable (mm)	Dimensions	Voltage	Bend Radius
LG-LN-FR-F16	IP67	18W/M Max	700lm/M 700lm/M 800lm/M	2700K* 3000K 4000K* RGB*	≥80	115°	Optional	Single	41.7mm	15x15mm	24V DC	≥120 mm

*On Request