


## LG-LN-FR-F16 (TOP BEND)

- Multiple spec, voltage 24V, length 20m roll, white light, RGB, optional.
- The silicone extrusion process, IP67 protection level, suitable for architectural outdoor lighting etc.
- Resistant to hydrochloric, acid and alkali corrosion, flame retardant, UV resistant.

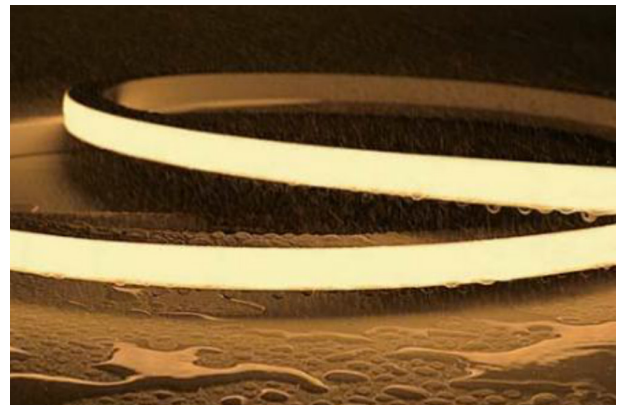

**700lm/M**  
**700lm/M**  
**800lm/M**  
LUMENS

**18W/M**  
MAX WATT

**2700K**  
**3000K**  
**4000K**  
RGB  
COLOUR



**IP67**  
IP RATING

**24V**  
DC


**120°**  
BEAM ANGLE

**3**  
**YEARS**  
WARRANTY


**OPTIONAL**  
DIMMING

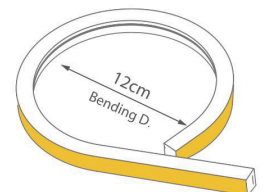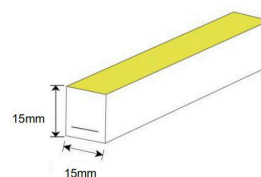

### Accessories




**End Cap Connector**  
LG-F16B-A005




**End Cap**  
LG-F16B-A008



**AL Clip 95mm**  
LG-F16B-A009  
(L95 x W16 x H1.05mm)



**Moldable Groove**  
LG-AS-FR-S1515A-005  
(L1000 x W15.9 x H11.4mm)



**Pre-Installed Al Carrier**  
LG-AS-FR-S1515A-004  
(L1000 x W17 x H17.9mm)

IK08



Model	IP Rating	Power (W)	Lumen Output (lm)	CCT	CRI	Beam Angle	Dimming	Row Type	Cuttable (mm)	Dimensions	Voltage	Bend Radius
LG-LN-FR-F16	IP67	18W/M Max	700lm/M 700lm/M 800lm/M	2700K* 3000K* 4000K* RGB*	≥80	115°	Optional	Single	41.7mm	15x15mm	24V DC	≥120 mm

\*On Request